

# TC304/TC309 Student Contest on Data Analytics Applied to 304dB

(August 6-8 2021, Chongqing, China)

## Question Description

A small structure is to be supported on one pile founded entirely in clayed soil, and the diameter and length of the pile are 0.4 m and 4.5 m, respectively. This pile is bored dry without casing, and concreted on the same day. The location of this pile is shown in Figure 1. For ease of the design of this pile foundation, a site investigation consisting of a set of cone penetration tests (CPT) is conducted at the site, and the locations of these soundings are illustrated in Figure 1. The collected CPT data are available in the attached file of **Sounding\_Data.xls**. The data are extracted from the A-CPT/232/2500m<sup>2</sup> dataset (Jaksa 1995; Jaksa et al. 1999) in the 304dB webpage (<http://140.112.12.21/issmge/tc304.htm?#6>). The participants are required to select appropriate methods for interpreting the **tip resistance ( $q_c$ )** and **side friction ( $f_s$ )** at the pile location based upon the available CPT data, and then evaluate the ultimate bearing capacity of this pile foundation. An empirical approach is suggested here for evaluating the pile ultimate bearing capacity from the CPT data (Schmertmann 1978, Cai et al. 2009).

$$Q_u = Q_b + Q_s = q_p A_p + \sum_{i=1}^n f_{pi} A_{si} \quad (1)$$

where  $Q_u$  is the ultimate axial pile capacity,  $Q_b$  is the end-bearing capacity,  $Q_s$  is the shaft friction capacity,  $q_p$  is the unit end bearing,  $A_p$  is the pile end area,  $A_s$  is the surface area along the pile shaft, and  $f_p$  is the unit shaft friction. The equations for estimating  $q_p$  and  $f_p$  are given below (Schmertmann 1978).

$$q_p = (q_{c1} + q_{c2}) / 2 \leq 15 \text{ MPa} \quad (2)$$

$$f_p = k_c f_s \leq 120 \text{ kPa}, k_c = 0.2 - 1.25 \quad (3)$$

where  $q_{c1}$  is minimum of the average of  $q_c$  values of zones ranging from 0.7 to  $4D$  below pile tip,  $D$  is pile diameter, and  $q_{c2}$  is average minimum  $q_c$  values  $8D$  above the pile tip.

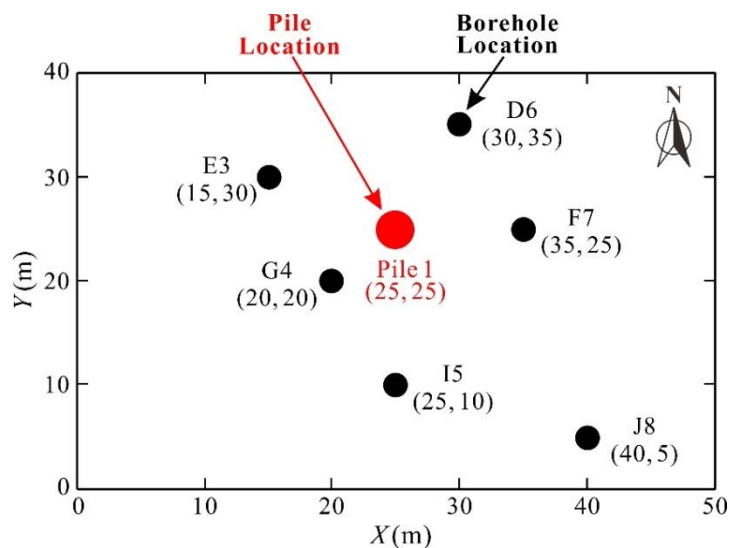


Figure 1. Locations of the pile and CPTs

Note that while this empirical approach is suggested, the participants are allowed to adopt some other models, but are required to provide some justifications. For example, the model uncertainty in some models can be explicitly included. The participants are also allowed to make essential assumptions or simplifications, but are required to provide some justifications. The possible materials that might be involved could be referred to **Potential References**.

### **Other Information**

The participants in this TC304 Student Contest session are required to:

- 1) Submit a full length paper in English (which will not be formally published), the academic staffs cannot be listed as co-authors and might only be mentioned in the acknowledgments.
- 2) Present the design outcome and procedures in the TC304 Student Contest session (10 minutes presentation and 5 minutes Q&A).

A TC304 committee will review the papers and presentations, and select the winner(s) for the ISSMGE TC304 Student Contest Award. An award certificate will be given to the winner(s) during the conference. Depending on the number of participants, a number of encouragement awards may be also awarded.

### **Important Dates**

May 15 2021: Submission of participation form (to Prof. Hai-Qing Yang [yanghaiqing06@163.com](mailto:yanghaiqing06@163.com))

Jul 15 2021: Submission of full length paper (to Prof. Hai-Qing Yang [yanghaiqing06@163.com](mailto:yanghaiqing06@163.com))

Aug 6-8 2021: Student Contest in Chongqing, China

If you have questions, please contact Prof. Hai-Qing Yang ([yanghaiqing06@163.com](mailto:yanghaiqing06@163.com))

### **Potential References**

- [1] Jaksa, M. (1995). The Influence of Spatial Variability on the Geotechnical Design Properties of a Stiff, Overconsolidated Clay. Ph.D. Dissertation, University of Adelaide, Australia.
- [3] Jaksa, M., Kaggwa, W.S., and Brooker, P.I. (1999). Experimental evaluation of the scale of fluctuation of a stiff clay. Proceedings of the 8th International Conference on Application of Statistics and Probability, A.A. Balkema, Rotterdam, 415-422.
- [3] Cai, G., Liu, S., Tong, L., and Du, G. (2009). Assessment of direct CPT and CPTU methods for predicting the ultimate bearing capacity of single piles. Engineering Geology, 104(3-4), 211-222.
- [4] Schmertmann, J.H. (1978). Guidelines for Cone Penetration Test, Performance and Design. U.S. Department of Transportation, Washington, D.C., p. 145. Rep. No. FHWA-TS-78-209.
- [5] Eslami, A., and Fellenius, B. H. (1997). Pile capacity by direct CPT and CPTu methods applied to 102 case histories. Canadian Geotechnical Journal, 34(6), 886-904.
- [6] Tang, C., and Phoon, K. K. (2018). Characterization of model uncertainty in predicting axial resistance of piles driven into clay. Canadian Geotechnical Journal, (999), 1-21.
- [7] Gwizdała, K., and Stęczniewski, M. (2007). Determination of the bearing capacity of pile foundations based on CPT test results. Studia Geotechnica et Mechanica, 29(1-2), 55-67.
- [8] Lu, G. Y., and Wong, D. W. (2008). An adaptive inverse-distance weighting spatial interpolation technique. Computers and Geosciences, 34(9), 1044-1055.

- [9] Van Beers, W. C., and Kleijnen, J. P. (2003). Kriging for interpolation in random simulation. *Journal of the Operational Research Society*, 54(3), 255-262.
- [10] Driscoll, T. A., and Heryudono, A. R. (2007). Adaptive residual subsampling methods for radial basis function interpolation and collocation problems. *Computers and Mathematics with Applications*, 53(6), 927-939.
- [11] Driscoll, T. A., and Fornberg, B. (2002). Interpolation in the limit of increasingly flat radial basis functions. *Computers and Mathematics with Applications*, 43(3-5), 413-422.
- [12] Hengl, T., Heuvelink, G. B., and Stein, A. (2004). A generic framework for spatial prediction of soil variables based on regression-kriging. *Geoderma*, 120(1-2), 75-93.
- [13] Hengl, T., Heuvelink, G. B., and Rossiter, D. G. (2007). About regression-kriging: From equations to case studies. *Computers and Geosciences*, 33(10), 1301-1315.
- [14] Wang, Y., and Zhao, T. (2016). Interpretation of soil property profile from limited measurement data: a compressive sampling perspective. *Canadian Geotechnical Journal*, 53(9), 1547-1559.
- [15] Nuttall, J. D., Hicks, M. A., and Lloret, C. M. (2013). Stochastic approach to slope stability analysis with in-situ data. *Industrial Safety and Life Cycle Engineering*, 527-538.
- [16] Lloret-Cabot, M., Hicks, M. A., and van den Eijnden, A. P. (2012). Investigation of the reduction in uncertainty due to soil variability when conditioning a random field using Kriging. *Géotechnique Letters*, 2(3), 123-127.
- [17] Liu, Y., Li, J., Sun, S., and Yu, B. (2019). Advances in Gaussian random field generation: A review. *Computational Geosciences*, 1-37.
- [18] Tian, M., Li, D. Q., Cao, Z. J., Phoon, K. K., and Wang, Y. (2016). Bayesian identification of random field model using indirect test data. *Engineering Geology*, 210, 197-211.
- [19] Cai, Y., Li, J., Li, X., Li, D., and Zhang, L. (2019). Estimating soil resistance at unsampled locations based on limited CPT data. *Bulletin of Engineering Geology and the Environment*, 78(5), 3637-3648.
- [20] Gong, W., Juang, C. H., Martin II, J. R., Tang, H., Wang, Q., & Huang, H. (2018). Probabilistic analysis of tunnel longitudinal performance based upon conditional random field simulation of soil properties. *Tunnelling and Underground Space Technology*, 73, 1-14.
- [21] Huang, J., Zheng, D., Li, D. Q., Kelly, R., and Sloan, S. W. (2017). Probabilistic characterization of two-dimensional soil profile by integrating cone penetration test (CPT) with multi-channel analysis of surface wave (MASW) data. *Canadian Geotechnical Journal*, 55(8), 1168-1181.
- [22] Xiao, T., Li, D. Q., Cao, Z. J., and Zhang, L. M. (2018). CPT-based probabilistic characterization of three-dimensional spatial variability using MLE. *Journal of Geotechnical and Geoenvironmental Engineering*, 144(5), 04018023.